
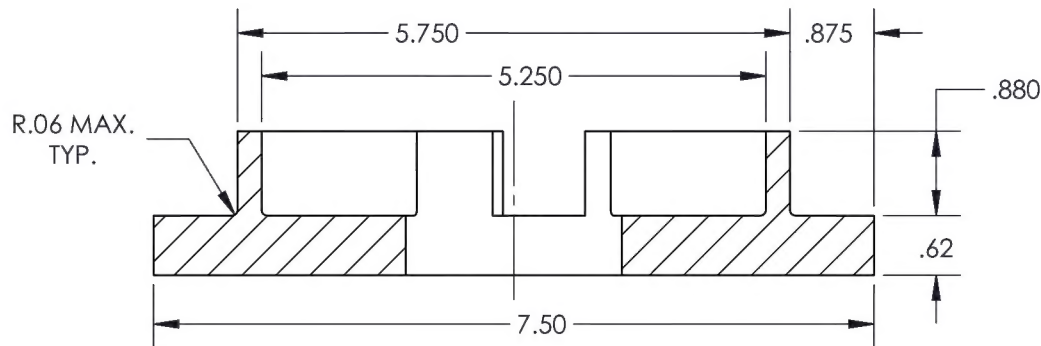
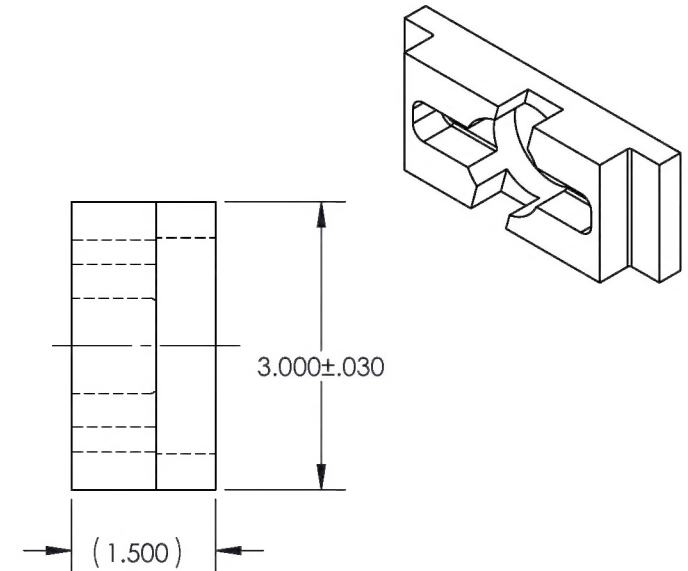


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		CH'D TITLE BLOCK & REVISION BLOCK, ADDED ENGRAVE NOTE P/N -5, MOVED P/N -3 TO SEPARATE DWG. TOOLS ARE SOLD SEPARATELY.	12/7/2009	RJC	RW
2	17-0141	CH'D DIM'S WAS (x4) R.310 IS 4X R.31, WAS 1.500 IS 1.50, WAS 3.000 IS 3.000±.030, WAS .620 IS .62, WAS 3.750 IS 3.75, WAS 7.500 IS 7.50, WAS 2 PLACES WAS 1.010/.980 IS 2X 1.010/.980, WAS .500 IS 2X .498, ADDED DIM (1.500). CH'D NOTE WAS STAMP IS ENGRAVE T/N, S/N, "MADE IN USA". ADDED FINISH SPEC MIL-A-8625F, TYPE II, CL II. ADDED USED ON MODEL NOTE.	6/19/2017	RJC	JAG

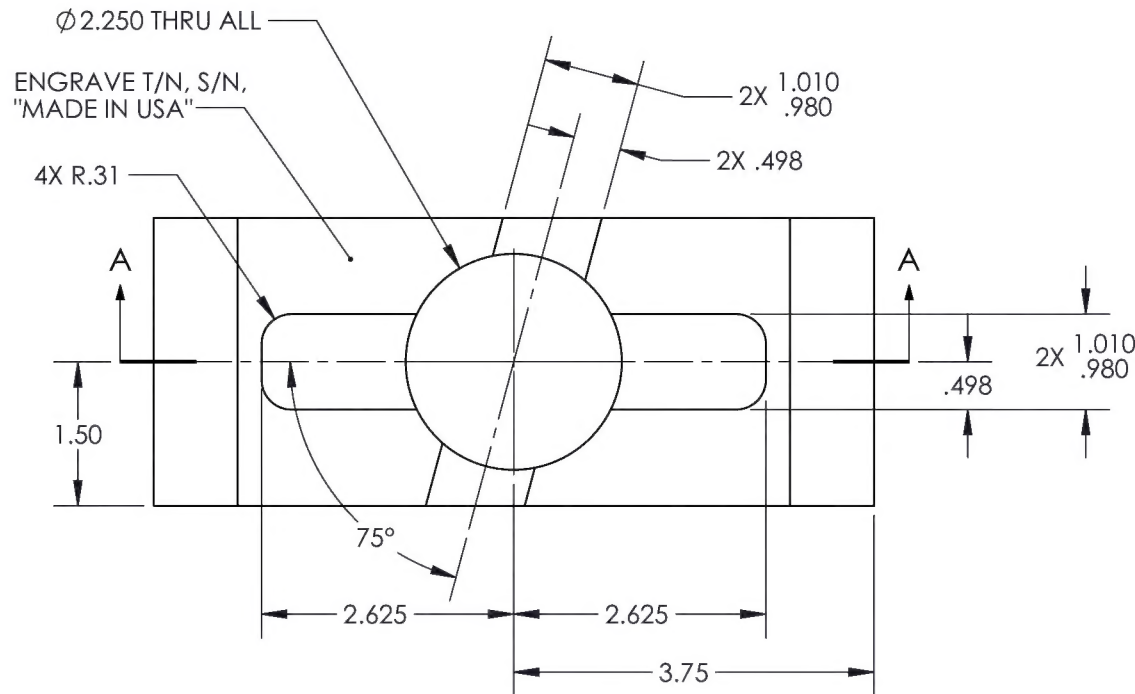

SECTION A-A

NOTE:
USED ON MODELS: HUGHES 269, TH-55,
SCHWEIZER 300 SERIES.

DART AEROSPACE	
TITLE HOLDING BLOCK	
DWG NO. RBD29822-3	REV 2
MAT'L 6061 HEAT TREAT FINISH BLACK ANODIZE SPEC MIL-A-8625F, TYPE II, CLASS II	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 SURFACES = 125✓	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: PERRITT CHECKED: DD 06/19/2017 OPPTS APPR: AA 06/20/2017 QA APPR: JL 06/28/2017 APPROVED: JAG 07/03/2017	
USED ON MODEL	
SCALE 1:2	DATE 3/29/2006
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
				1	HOLDING BLOCK	6061		